

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



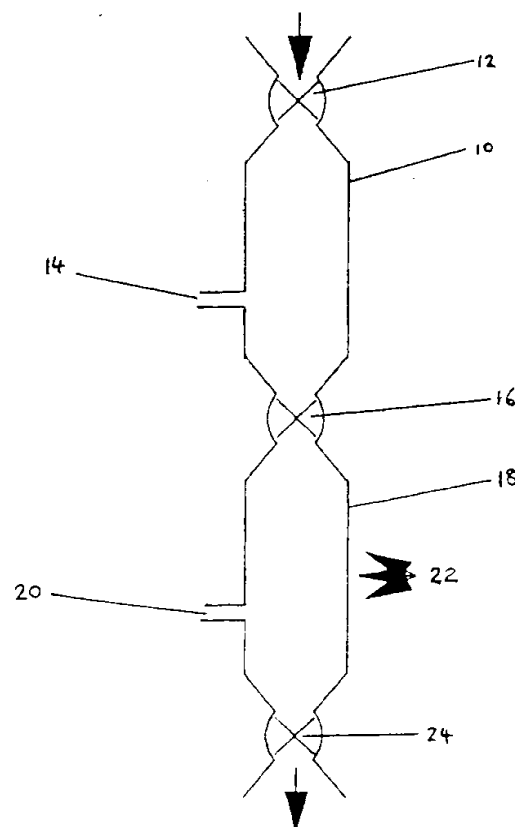
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A24B 3/18		A1	(11) International Publication Number: WO 95/01108
			(43) International Publication Date: 12 January 1995 (12.01.95)
(21) International Application Number: PCT/GB94/01359		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KG, KP, KR, KZ, LK, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 23 June 1994 (23.06.94)			
(30) Priority Data: 9313431.0 30 June 1993 (30.06.93) GB			
(71) Applicant (for all designated States except US): IMPERIAL TOBACCO LIMITED [GB/GB]; P.O. Box 244, Bristol BS99 7UJ (GB).		Published With international search report.	
(72) Inventor; and			
(75) Inventor/Applicant (for US only): CUNNINGHAM, William [GB/GB]; 1 Bramley Drive, Backwell, Bristol BS19 3HN (GB).			
(74) Agent: WILKINSON, Stephen, John; Stevens, Hewlett & Perkins, 1 St Augustine's Place, Bristol BS1 4UD (GB).			

(54) Title: IMPROVEMENTS IN OR RELATING TO PROCESSING OF SMOKING MATERIAL

(57) Abstract

A process for treating smoking material, such as tobacco, comprises heating smoking material having a moisture content of from 5 to 75 % at a temperature of from 70 to 220 °C at about or above atmospheric pressure in the presence of air and reducing the pressure on the heated smoking material at a rate sufficient to expand the smoking material.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

IMPROVEMENTS IN OR RELATING TO
PROCESSING OF SMOKING MATERIAL

The present invention relates to processing of smoking materials, particularly tobacco and tobacco substitutes.

5 In the tobacco industry it is well known to expand tobacco in order to increase its bulk volume. Increasing the bulk volume of the tobacco increases the filling power of the tobacco and, in addition, smoking articles incorporating a proportion of
10 expanded tobacco produce less tar and contain less nicotine because the weight of tobacco is reduced.

 There are many known methods of expanding tobacco. One of the methods uses carbon dioxide to expand the tobacco. In this process tobacco is soaked
15 in liquid carbon dioxide under pressure, the pressure released to solidify the carbon dioxide and then subjected to a high temperature which sublimates the carbon dioxide. The tobacco cells expand by virtue of a rapid pressure increase in the interior of the
20 cells.

 In another method, organic solvents are used to impregnate the tobacco. The tobacco is then quickly subjected to temperatures at least 30°C above the solvent's boiling point. Again, this quick
25 evaporation causes the cell walls of the tobacco to expand.

 A further known expansion method involves the impregnation of tobacco with nitrogen under a high pressure which is generally over 10 MPa (100 bar).
30 The tobacco is then decompressed and passed through a steam tunnel in which the temperature rises rapidly to about 90°C thereby causing the tobacco to expand.

 GB 675292 describes a process for expanding tobacco in which the tobacco is first freed from air
35 and the air replaced by steam or water vapour. The

- 2 -

treated tobacco is heated with steam and the pressure is then reduced to expand the tobacco. Pretreatment to remove air from the tobacco appears to be essential to the process.

5 The present invention involves a process for expanding smoking material which does not require a pretreatment step to remove air. It has been found that the presence of air during the process leads to no deleterious effects and, therefore, that no
10 pretreatment to remove air is necessary.

 According to the present invention, there is provided a process for treating smoking material comprising heating smoking material having a moisture content of from 5 to 75% by weight at a temperature of
15 from 70 to 220°C at about or above atmospheric pressure in the presence of air and reducing the pressure on the heated smoking material at a rate sufficient to expand the smoking material.

 The pressure on the smoking material is
20 preferably reduced to from 0.1 to 50 kPa (1 to 500 mbar). This has been found to give good expansion of the smoking material.

 The term "in the presence of air", as used herein, means that at least 2% air is present. The
25 atmosphere in which the smoking material is heated may be 100% air or mixtures of from 2 - 100% air with other gases such as steam, carbon dioxide and nitrogen.

 Advantageously, the smoking material can be
30 heated by direct application of steam, either saturated or superheated. The smoking material is heated to a temperature in the range of from 70 to 220°C under a pressure of from 0.1 to 2 MPa (1 to 20 bar gauge), preferably in the range from 102 to 160°C
35 under a pressure of from 0.11 to 0.5 MPa (1.1 to 5

- 3 -

bar). Alternatively, the smoking material may be heated by exposure to other relatively hot gases or radiant heat such as microwave radiation.

5 It is preferred that the pressure reduction to vacuum conditions is rapid and, typically, takes place in about 0.04 seconds. The process is well suited to expansion of tobacco and the bulk expansion may be in the range 20 to 100%.

10 Good results have been obtained where the smoking material has an initial moisture content of from 20 to 75% (more preferably 30 to 75% by weight) by weight and returns to near or below its original moisture content during the process, such as to a moisture content of up to 15% by weight.
15 Surprisingly, by operating the process in this way the expanded smoking material retains its expanded state without requiring further treatment such as by freeze-drying.

Typically, the process of the invention is
20 carried out as follows. Smoking material having a water content between 5 and 75% water on a wet weight basis is placed in a heating vessel. For water contents at the higher end of this range, the smoking material may require moistening by methods well-known
25 in the art. It may be desirable to include some additives in the water used to wet the smoking material in order to improve performance in terms of improved expansion levels, resilience or the inherent smoking properties of the smoking material. Heat is
30 applied until the desired temperature and pressure are achieved. The smoking material is then subjected to rapid depressurisation to vacuum conditions, either by rapidly reducing the pressure in the vessel or by transferring the smoking material directly to a second
35 vessel under vacuum conditions. The rapid pressure

- 4 -

reduction combined with the heat in the smoking material causes rapid evaporation of the water contained within the cell structure of the smoking material and results in its expansion. The smoking
5 material may be subjected to one or more such stages of heating followed by rapid pressure reduction to partial vacuum pressures.

Indirect heat may be applied to the smoking material during and/or after the vacuum stage
10 (preferably during the vacuum stage) to accelerate the water evaporation. This can be achieved in a number of ways such as by radiant heat (e.g., microwave or infra-red radiation). This aspect of the invention may conveniently be carried out by heating the smoking
15 material using microwave radiation before pressure reduction and continuing the heating in the same vessel after pressure reduction. The resulting dried expanded product has a more stable structure.

From the tobacco production point of view the
20 above process could be used for batch expansion of tobacco or could be incorporated as an on-line, continuous process stage. The latter would of course reduce handling and storage requirements.

The expanded tobacco can therefore, when
25 heated in air, be produced without using substances which are expensive and require recovery systems which increase process costs. The expanded tobacco is resilient and is not prone to degradation. In addition water does not tend to leach out constituents
30 of the tobacco.

It is anticipated that Filling Power Improvement (FPI) will be in the range 20 to 100%. With an FPI of 30% the tobacco weight of a smoking article could be reduced by as much as 17%. With a
35 FPI of 60% the tobacco weight could be reduced by as

- 5 -

much as 26%.

Due to the resilience of expanded tobacco produced by the present invention there are no practical limits to the amount that can be used in the production of a smoking article, whether it be a cigarette or a cigar.

The present expanded tobacco compares very favourably with the known expanded tobaccos in performance whilst at the same time being formed by a process having the distinct advantages described above.

Figures 1 and 2 show, by way of example, schematic diagrams of apparatus which may be used for carrying out the process of the present invention.

Referring to Figure 1, smoking material (not shown) enters pressure chamber 10 through a first seal 12 where it is treated with pressurised steam supplied through inlet 14. The treated smoking material then passes through a second seal 16, with air locks as appropriate, into vacuum chamber 18 connected to a vacuum by outlet 20. Heat source 22 provides radiant heat to maintain the temperature of the smoking material at a given value whilst the vacuum is applied. The resulting product, expanded tobacco, is removed from chamber 18 via a third seal 24 with appropriate air locks.

Referring to Figure 2, smoking material 30 is supported in glass bell jar 32 by sample support 34. Smoking material 30 is heated by exposure to microwave radiation from microwave generator 36 via wave guide 38 and mode stirrer 40. With vacuum pump 42 on, valve 46 is opened to reduce the pressure in bell jar 32 via connecting line 44 to expand the smoking material. Heating may be continued to lower the moisture content of the expanded tobacco even further.

- 6 -

EXAMPLE 1

5 Cigar filler tobacco was heated in saturated steam at a pressure of 200 kPa (2 bar) for the times shown in Table 1 below. The temperature of tobacco will have reached or nearly reached 133°C, the temperature of the steam. After the steam supply was shut off, the tobacco was depressurised by opening a valve to an attached vacuum source at a pressure of 10 0.8 kPa (8 mbar) and the temperature allowed to drop only to a given cut off temperature. The results are shown in Table 1.

15

20

25

30

35

TABLE 1

Starting Moisture (%)	Starting Filling Value (cm ³ /g)	Steaming Time (minutes)	Cut Off Temperature (°C)	Final Filling Value (cm ³ /g)	Final Moisture (%)	Overall FPI (%)
26	5.17	1 + 1*	50	5.79	31.3	22.9
26	5.17	1	30	5.68	34.3	20.6
26	4.99	1	45	5.62	-	23.8
32	5.11	1	50	5.62	-	23.8
30	5.22	1 + 1*	50	5.73	38	21.7
30	5.22	1	30	5.96	33.3	26.5
30	5.22	1 / 1*	50/30	5.79	46	22.9

* +1 indicates that the steam was turned off after the initial steaming time and the tobacco was allowed an additional one minute soak time prior to the vacuum being pulled.

/ indicates multiple cycles with steaming times for each cycle and temperature attained with vacuum before re-steaming or end of test.

- 8 -

EXAMPLE 2

5 Tests were carried out using a 6 kW microwave oven equipped with a vacuum pump capable of achieving a pressure of about 2.5 kPa (25 mbar). The apparatus used for the tests is the same as that shown schematically in Figure 2.

The basic sequence of the process was as follows:

- 10 1 Place a small sample of tobacco under the glass bell jar.
- 2 Turn on the vacuum pump with the connecting valve in the closed position.
- 3 Turn on the microwave source at full power to preheat the tobacco.
- 15 4 With the microwave power still on, open the vacuum valve.
- 5 Allow the microwave cycle to complete. Depressurise the bell jar and remove the sample.
- 20

The results of the tests carried out on cigarette cut lamina and cigar filter are shown in Table 2.

25

30

35

TABLE 2

Heating Time (secs)	Vacuum (secs)	Sample Weight In (g)	Sample Weight Out (g)	Temp Out (°C)	Moisture In (%)	Moisture Out (%)	Filling Value In (cm ³ /g)	Filling Value Out (cm ³ /g)	FPI (%)	Overall FPI (%)
---------------------	---------------	----------------------	-----------------------	---------------	-----------------	------------------	---------------------------------------	--	---------	-----------------

(i) Cigar Filler - Initial Filling Value 5.11

10	10	50	29.4	36	48.1	12.9	5.70	7.21	26.49	41.10
5	15	50	29.6	38	48.1	13.5	5.70	7.27	27.54	42.27
5	15	50	30.7	38	48.1	14.6	5.70	6.53	14.56	27.79
10	10	50	30.2	41	48.1	13.6	5.70	6.58	15.44	28.77
20	40	75	28.7	56	67.0	9.0	5.70	6.36	11.58	24.46
15	30	75	30.3	46	67.0	14.7	5.70	6.70	17.54	31.12

(ii) Cigarette Cut Lamina - Initial Filling Value 3.92

5	15	3x50	av33.2	av 39	50.1	25.6	4.26	4.74	11.27	20.92
10	10	50	36.4	34	50.1	30.7	4.26	4.60	7.98	17.35
10	20	3x50	av30.8	av 47	50.1	17.5	4.26	4.82	13.15	22.96
10	20	100	69.6	41	50.1	24.9	4.26	4.68	9.86	19.39
8	16	2x50	36.2/35.6	42/46	40.9	16.0	4.31	4.82	11.83	22.96
6	12	100	40.2/41	48/46	29.0	12.6	4.29	4.80	11.89	22.45

- 10 -

CLAIMS

- 1 A process for treating smoking material
comprising heating smoking material having a moisture
5 content of from 5 to 75% by weight at a temperature of
from 70 to 220°C at about or above atmospheric
pressure in the presence of air and reducing the
pressure on the heated smoking material at a rate
sufficient to expand the smoking material.
- 10 2 Process as claimed in claim 1, wherein the
pressure on the heated smoking material is reduced to
from 0.1 to 50 kPa.
- 3 3 Process as claimed in claim 1 or claim 2,
wherein the smoking material is heated at from 102 to
15 160°C.
- 4 4 Process as claimed in any one of claims 1 to
3, wherein the heating is carried out with the smoking
material subjected to a pressure of from 0.1 to 2 MPa.
- 5 5 Process as claimed in any one of claims 1 to
20 4, wherein the smoking material has a moisture content
before heating of from 20 to 75% by weight.
- 6 6 Process as claimed in any one of claims 1 to
5, wherein the moisture content of the expanded
smoking material is at or below the moisture content
25 of the smoking material before heating.
- 7 7 Process as claimed in any one of claims 1 to
6, wherein the moisture content of the expanded
smoking material is up to 15% by weight.
- 8 8 Process as claimed in any one of claims 1 to
30 7, wherein the smoking material is heated using steam.
- 9 9 Process as claimed in any one of claims 1 to
7, wherein the smoking material is heated by exposure
to radiant heat or microwave radiation.
- 10 10 Process as claimed in any one of claims 1 to
35 9, wherein the smoking material is heated during

- 11 -

and/or after the pressure reduction to accelerate water evaporation.

11 Process as claimed in claim 10, wherein the smoking material is heated during and/or after the pressure reduction by exposure to radiant heat.

12 Process as claimed in claim 11, wherein the radiant heat is provided by microwave radiation.

10

15

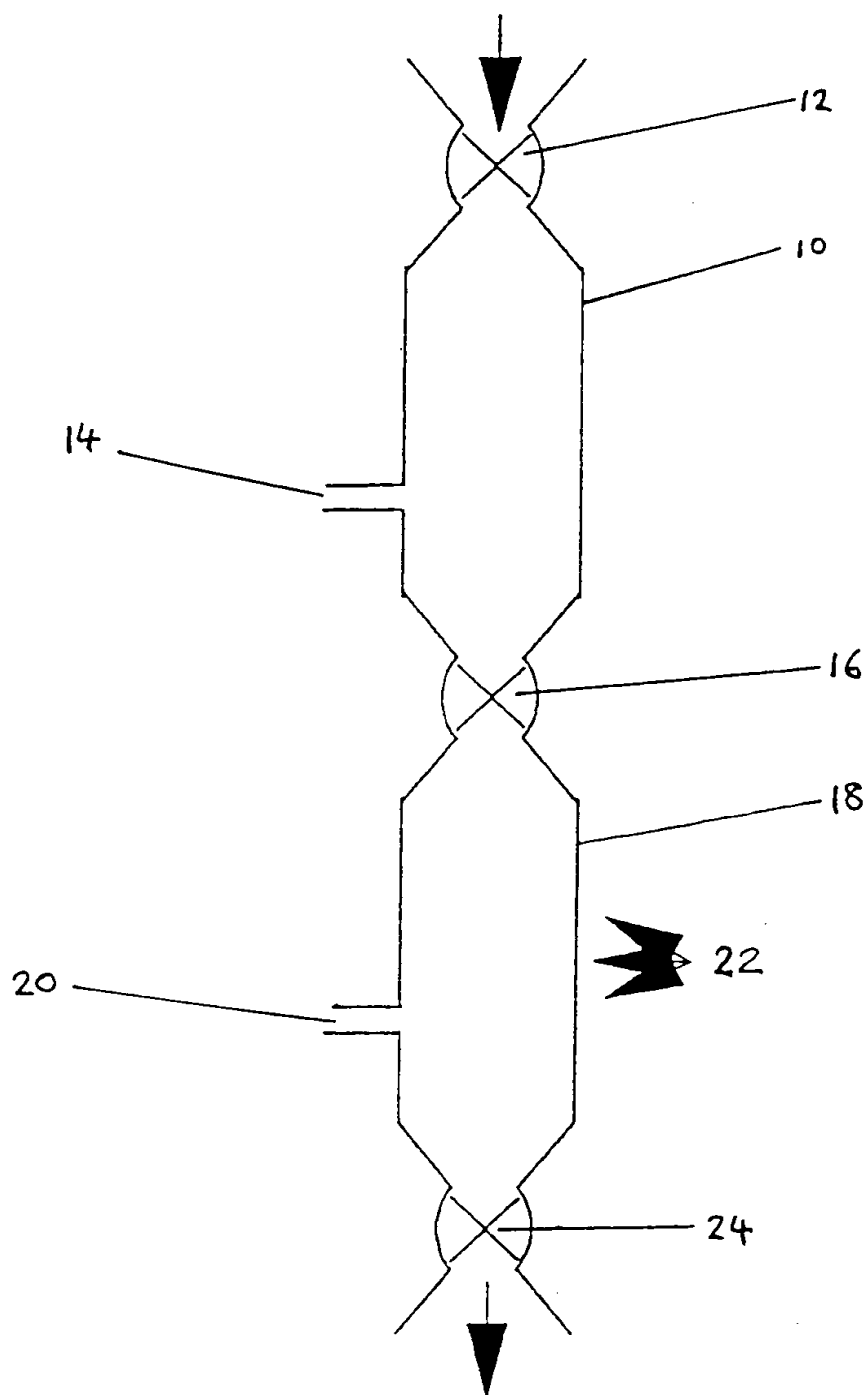
20

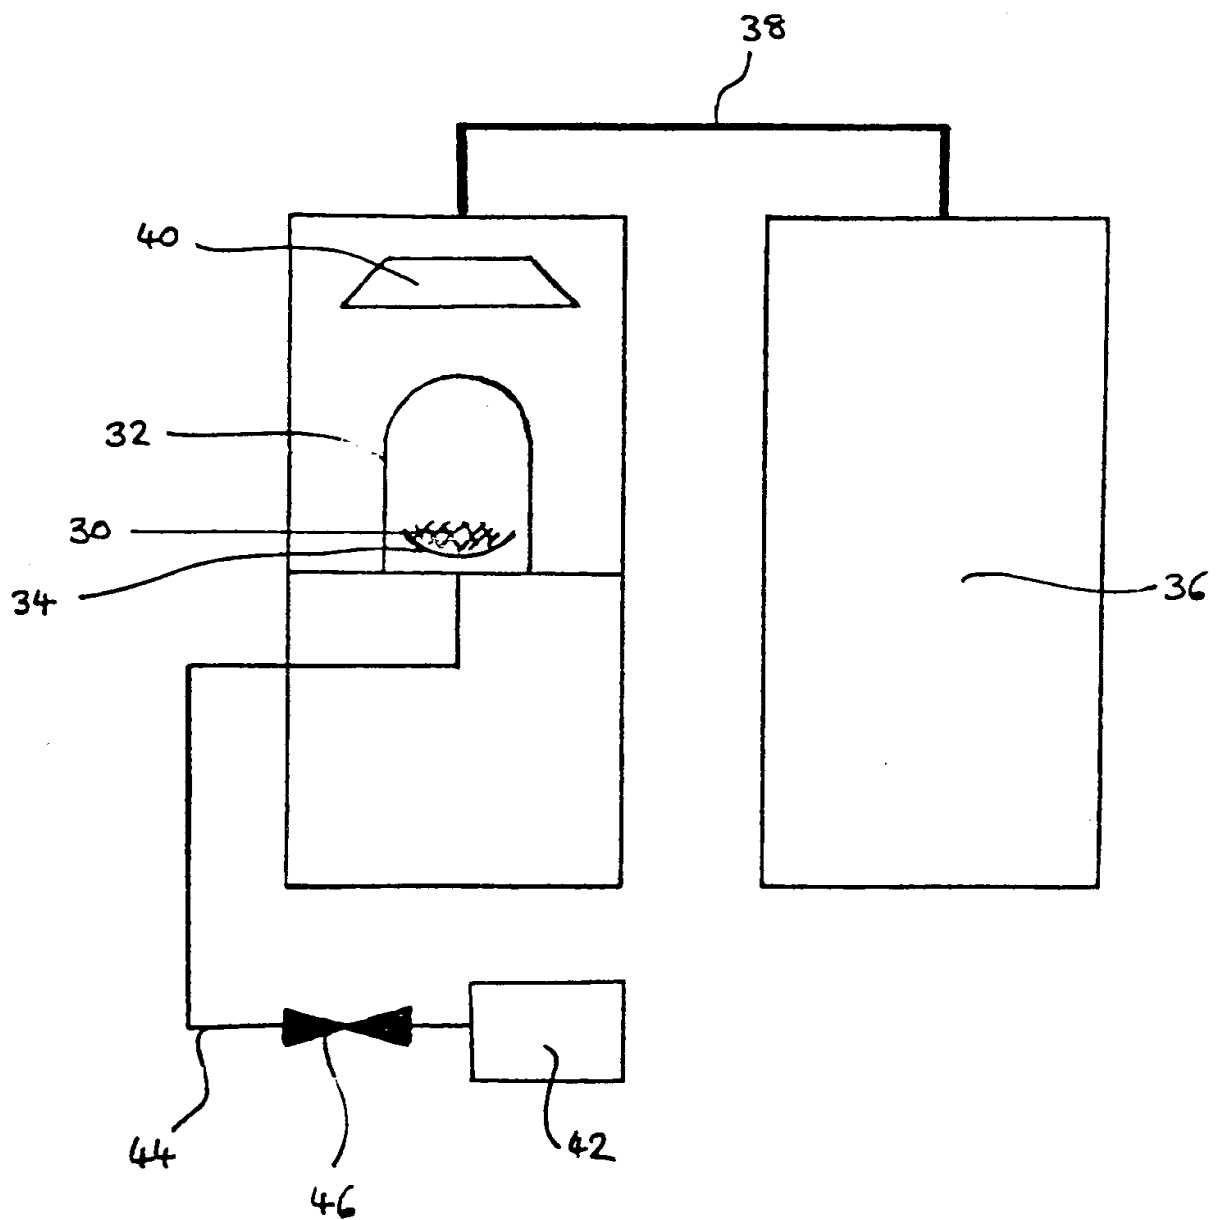
25

30

35

1/2

FIGURE 1

FIGURE 2

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A24B3/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,1 789 435 (HAWKINS) 20 January 1931 see the whole document ---	1
A	US,A,4 211 243 (OHNO) 8 July 1980 see the whole document ---	1,3,5,8
A	GB,A,2 193 076 (THE AMERICAN TOBACCO COMPANY) 3 February 1988 see the whole document ---	1,5,10
A	GB,A,1 381 203 (B.A.T. CIGARETTENFABRIKEN GMBH) 22 January 1975 see the whole document ---	1,10-12
A	US,A,3 823 722 (SMITH) 16 July 1974 see the whole document ---	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

- * "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- * "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- * "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * "&" document member of the same patent family

Date of the actual completion of the international search

21 September 1994

Date of mailing of the international search report

05. 10. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2260 HV Rijswijk
Tel. (+ 31-70) 346-2040, Tx. 31 651 epo nl,
Fax (- 31-70) 340-3016

Authorized officer

Riegel, R

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,675 292 (GUARDITE CORPORATION) 9 July 1952 cited in the application see the whole document -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

international application No.

PCT/GB 94/01359

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-1789435		NONE	
US-A-4211243	08-07-80	JP-C- 1119500	28-10-82
		JP-A- 53104797	12-09-78
		JP-B- 56001903	16-01-81
GB-A-2193076	03-02-88	US-A- 4791942	20-12-88
		CA-A- 1327931	22-03-94
		DE-A- 3725309	11-02-88
		FR-A- 2602122	05-02-88
		NL-A- 8701769	01-03-88
GB-A-1381203	22-01-75	DE-A- 2162902	19-07-73
		AU-B- 464413	28-08-75
		AU-A- 5005772	20-06-74
		BE-A- 802200	05-11-73
		BE-A- 792793	30-03-73
		CA-A- 977235	04-11-75
		LU-A- 66674	19-02-73
		NL-A- 7216813	19-06-73
US-A-3823722	16-07-74	US-A- 3991772	16-11-76
GB-A-675292		NONE	